Features

- Compact and light weight
- Card expansion channel
- Software filtering function
- Connect to strain gauge directly
- Available for 120 and 350 ohm inputs
- Easily connect to PC via Hi-Speed USB port
- All channels acquire strain signal simultaneously
- High speed sampling rate up to 10kHZ per channel
- User-friendly software with One-touch report generation function

Date record /analysis/report software

Real-time display ,Reporting function ,Parameters setting,Auto-calcalation function(Max/Min strain value ,Peak to Peak strain value,Diagonal strain, Max/Min Principal strain,Strain rate and more)

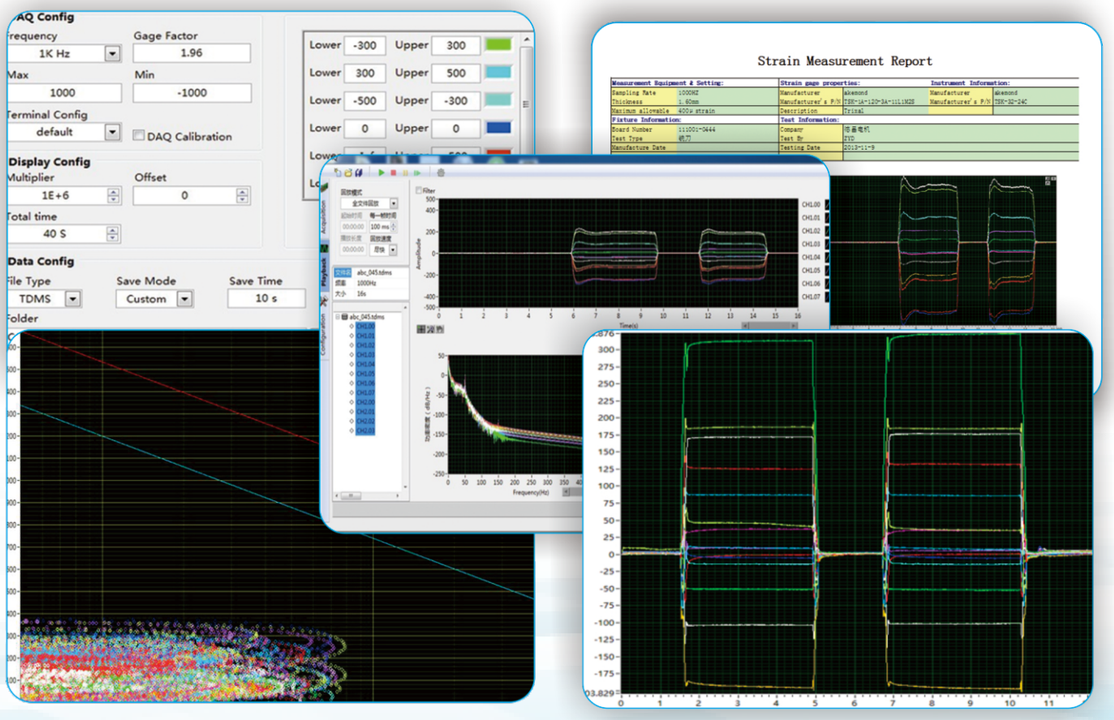

Specifications

Model:	TSK-32-8C(1 slots) TSK-32-16C(2 slots) TSK-32-24C(3 slots) TSK-32-32C(4 slots)
Number of Measuring Channels:	TSK-32-8C:8 channels with 1 module TSK-32-16C:16 channels with 2 module TSK-32-24C:24 channels with 3 module TSK-32-32C:32 channels with 4 module
Measurement Objects:	Strain gage
Measurement Range:	±55500uE
Accuracy:	±0.3%
Stability:	Temperature gain drift :6 ppm/℃
Sampling Method:	simultaneous sampling of all Channel
Sampling Frequency:	10KHZ/CH
Interface:	USB2.0
Operation Temperature:	-40℃ to 70℃
Storage Temperature:	-40℃ to 85℃
Power Supply:	110 to 220VAC

>>>>>>>>>>>>>PCB Circuit Board<<<<<<<<<<<<<<<<<


Scoreboard


ICT/ FCT

BGA

Assembly

>>>>>>>>>>>>>Other Tndustry<<<<<<<<<<<<<<<<<<<


Air Conditioning Pipe

Bridge

Tempered Glass

Excavator

ShenZhen Qualitykon Technology Development Co.,Ltd

TEL:(+86)0755-81464182 FAX:(+86)0755-89370613

E-mail:qualitykon.wang@qualitykon.com.cn

Web:www.qualitykon.com.cn

Dress:Floor 4th, Building 2nd,HuaLi Industry Park, Fuyongtown, Bo'an district,Shenzhen City, China